CMAG Pumped Condensate Application

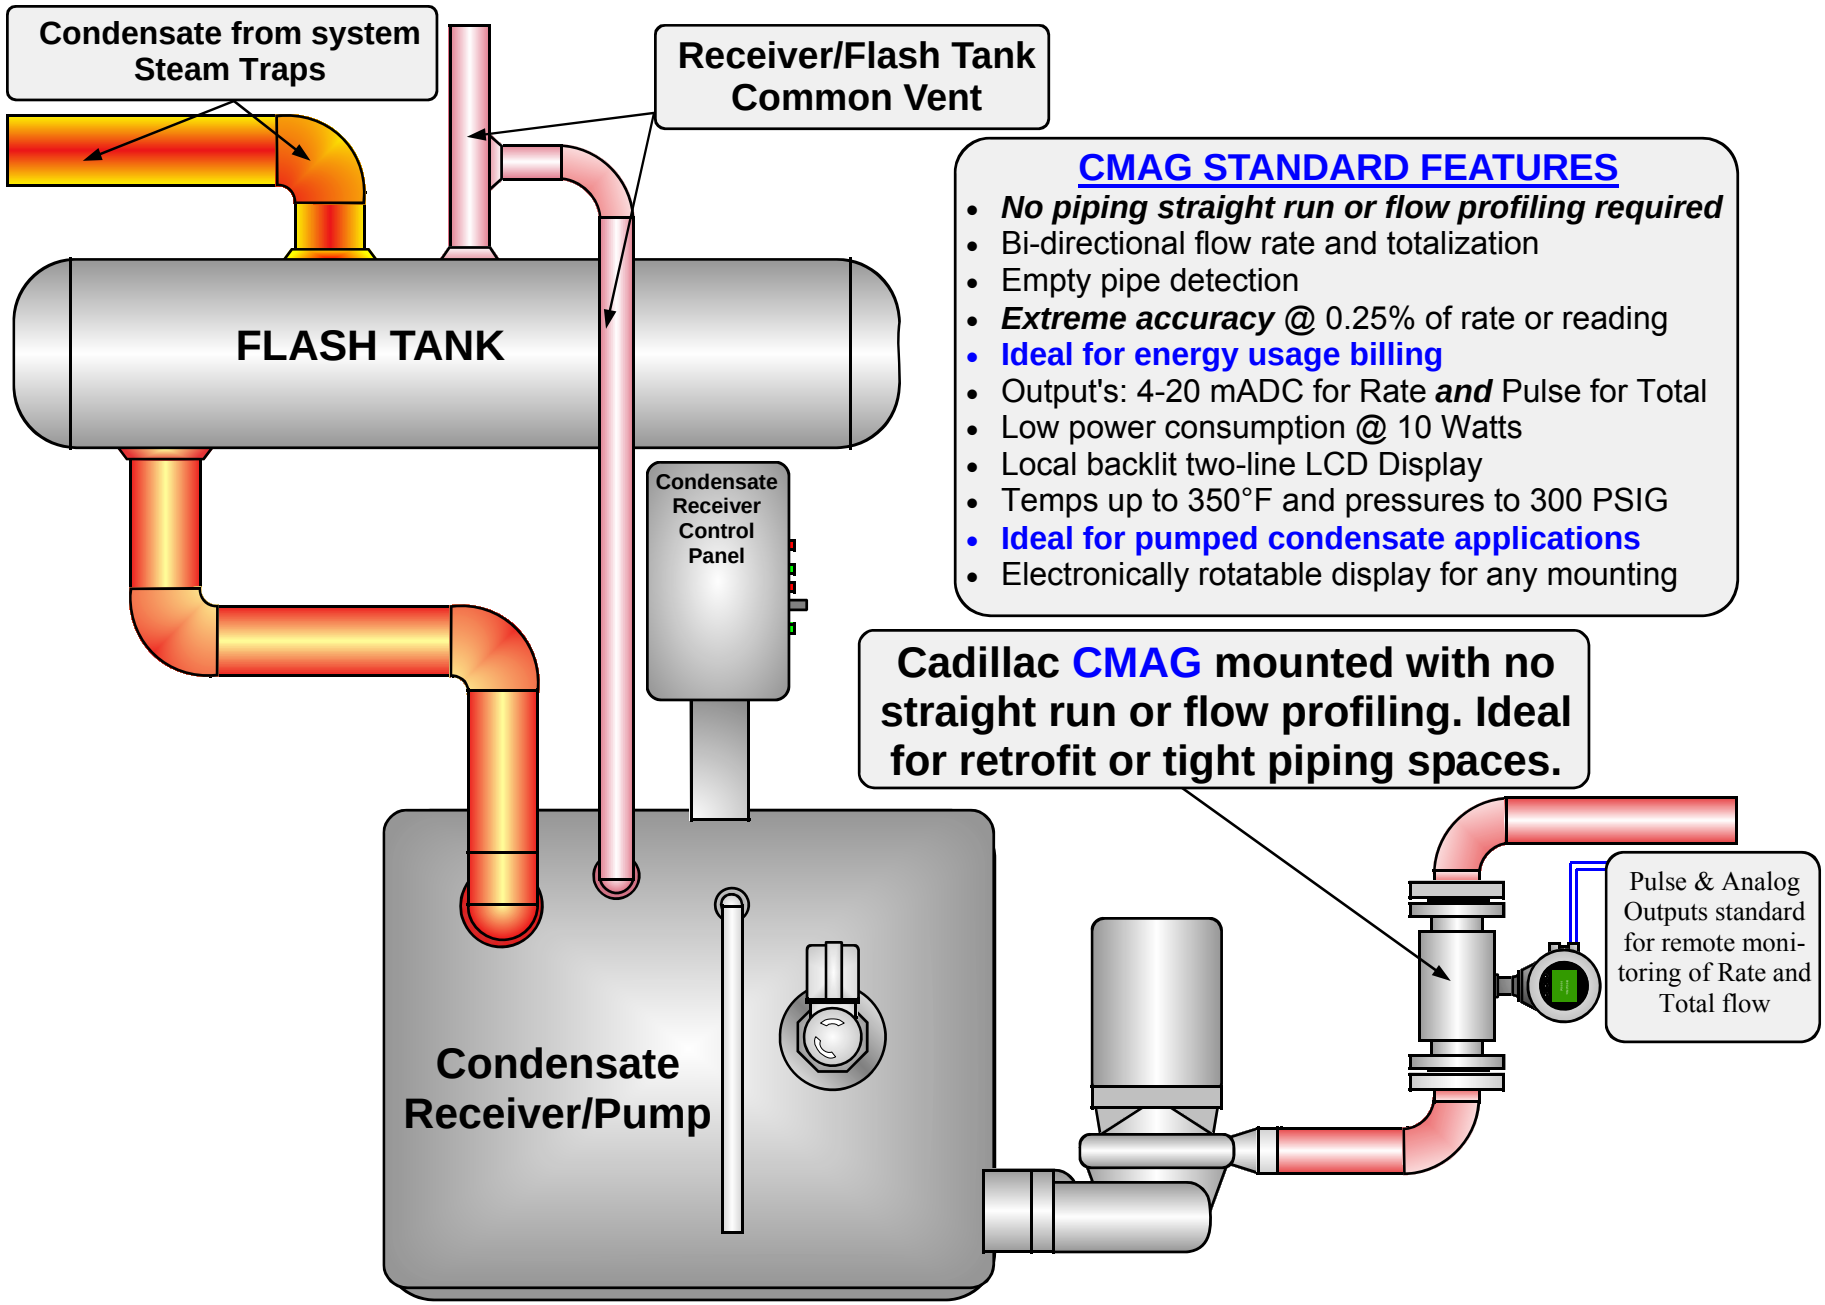

CMAG STANDARD FEATURES

- ***No piping straight run or flow profiling required***
- Bi-directional flow rate and totalization
- Empty pipe detection
- ***Extreme accuracy*** @ 0.25% of rate or reading
- **Ideal for energy usage billing**
- Output's: 4-20 mADC for Rate ***and*** Pulse for Total
- Low power consumption @ 10 Watts
- Local backlit two-line LCD Display
- Temps up to 350°F and pressures to 300 PSIG
- **Ideal for pumped condensate applications**
- Electronically rotatable display for any mounting